



Drive Chain

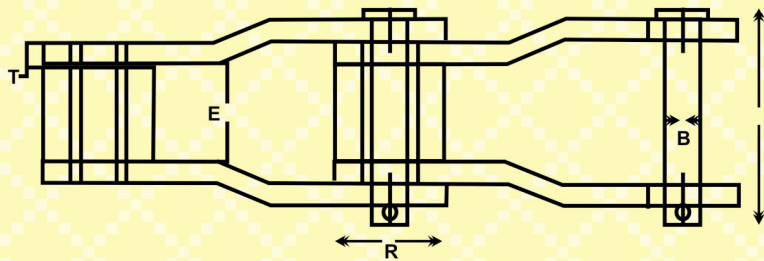

ISO 9001:2008 Certified Company

RMEI CHAIN NO.	PITCH P	BREAKING LOAD KGS	PIN		ROLLER		LINK	
			B	L APP.	R	E	W	T
RM-DC-01	63.5	35000	19.75	75	39.68	38	60	8
RM-DC-02	66.26	13000	11.1	69	22.22	28	32	6.5
RM-DC-03	77.9	49000	19	98	41.25	40	50	10
RM-DC-04	78.11	21000	15.85	88	31.75	38	40	8
RM-DC-05	78.11	35000	15.85	95	31.75	38	45	10
RM-DC-06	78.486	62000	22.2	115	44.45	38	60	12.7
RM-DC-07	102.45	77000	23.8	132	45.21	50	60	14
RM-DC-08	114.3	94000	27.9	136	57.15	53	76	14

Elevator Chain

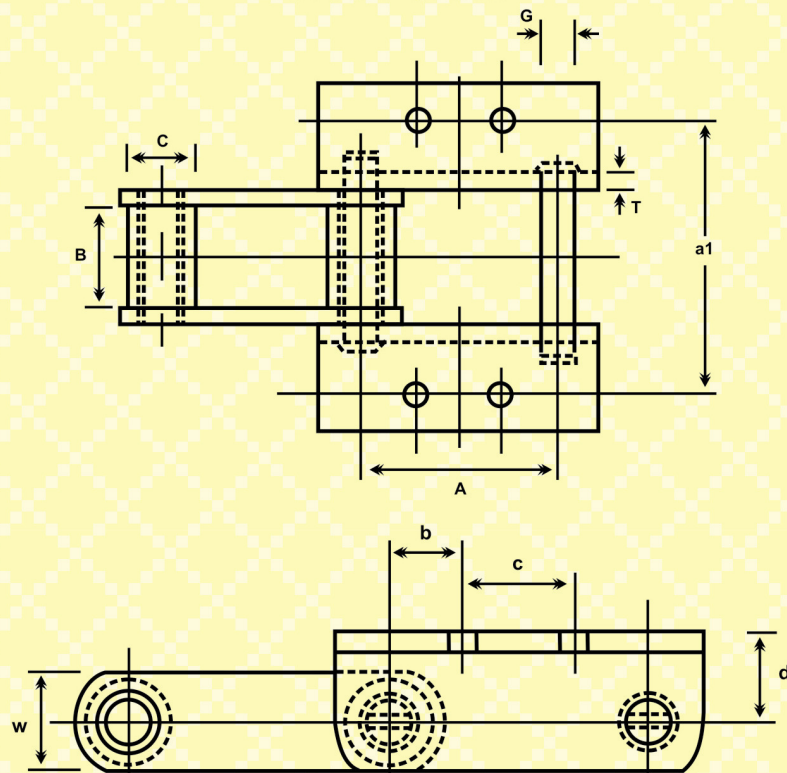

RMEI CHAIN NO.	PITCH A	BREAKING LOAD KG.	INSIDE WIDTH B	PIN DIA. G	ROLLER DIA. C	LINK		LINK		
						W	T	a1	c	d
RM-EC-01	101.6	25000	56.36	15.8	25.4	40	10	120.7	44.5	25.4
RM-EC-02	101.6	20000	50.8	15.8	31.75	40	8	120.7	44.5	34.9
RM-EC-03	101.6	28000	50.8	19.1	36.52	45	10	120.7	44.5	41.3
RM-EC-04	101.6	20000	38.1	15.8	34.93	40	8	120.7	63.5	34.9
RM-EC-05	116.94	20000	50.8	15.8	34.93	40	8	120.7	44.5	34.9
RM-EC-06	152.4	40000	50.8	19.1	41.3	60	10	120.7	58.7	50.8